

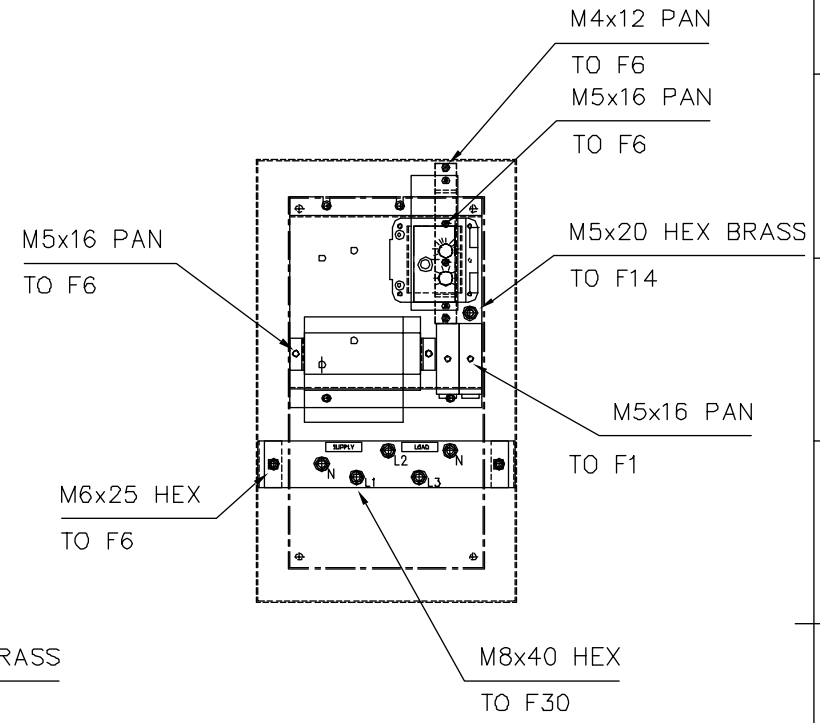


1 2 3 4 5 6 7 8 9 10 11 12

A B C D E F G H

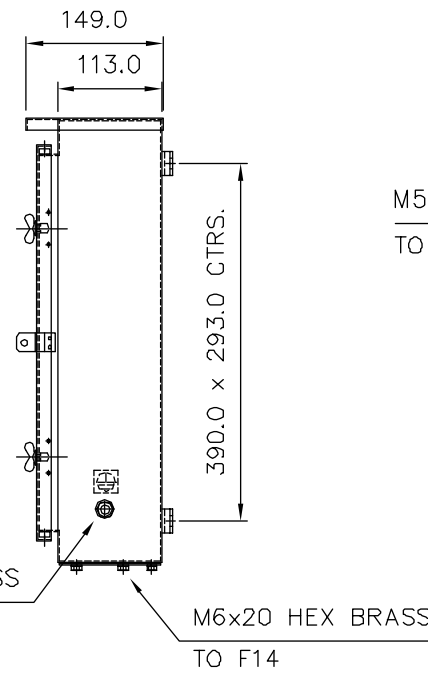

NOTE - WINDOW SECURED TO INSET PLATE WITH M4x12 PAN POSI FIXINGS TO F1. WINDOW TO BE SCREWED SHUT USING 1 No. M4x12 PAN POSI IN TOP POSITION. INCOMING DOOR HASP TO BE SUPPLIED LOOSE, HOLES IN DOOR FLANGE TO BE FITTED WITH APPROPRIATE FIXINGS TO ALLOW CUSTOMER TO FIT HASP IF REQUIRED.

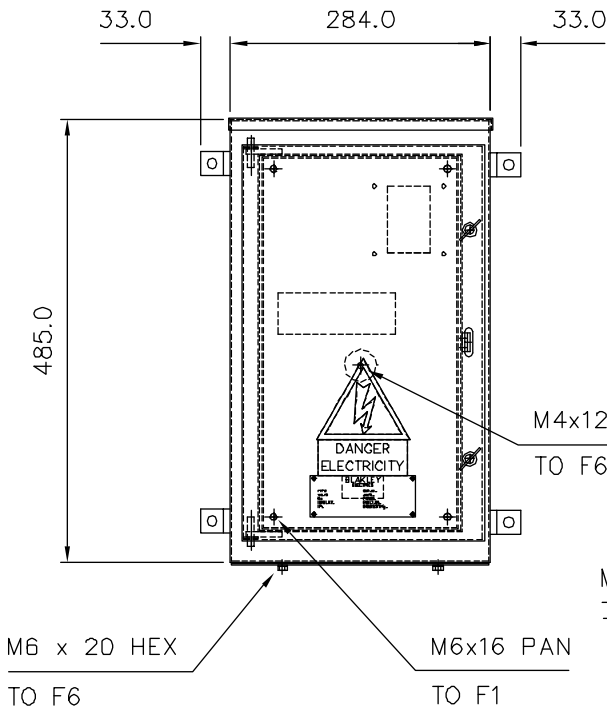

CUSTOMER INFORMATION COPY

REV:	A	B	C	D	E	F	G	H		
EDR:	2274	2858	3207	3404	3610	3618	4914	4990		
UNLESS OTHERWISE STATED:- ALL DIMENSIONS IN MM. TOLERANCES TO H30052 FIXING STANDARD TO H30051 WIRING STANDARD TO H20051 WELDING STANDARD TO QAI 61.										
DO NOT SCALE THIS DRAWING. IF IN DOUBT, ASK					MATERIAL					SIZE
TITLE					REF.					COPY ISSUED
GENERAL ASSEMBLY SAFELINK UNITS SRC/OC/3N/100/VELS					ORIGINAL SCALE 1:4 DATE 14.05.09					BLAKLEY ELECTRICS LIMITED
DRN. MC					DRAWING No.					REVISION
CHKD.					B6038					H
APPD.					SHEET 1 OF 1					

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT, WITHOUT THEIR WRITTEN CONSENT, BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE.

1 2 3 4 5 6 7 8 9 10 11 12 A2