

Floristoon Lighting

Floristoon is a unique, patented 110 volt fluorescent lighting system developed by Blakley Electrics specifically for temporary installations. The system comprises of 100M lengths of 1.5mm² or 2.5mm² 3 core PVC Arctic Grade cable with a unique, 3 pin, IP2X outlet moulded at 5M, 7M or 10M intervals.


Fluorescent fittings are anti-corrosion, IP65 type and are available as 5' singles or 2' twins, with or without 3 hour maintained emergency battery packs. Fittings are supplied with tubes and suspension hooks and are pre-wired with a 2M, 1.5mm², 3 core input lead, which incorporates a moulded-on 3 pin Flori adaptor. Adaptors can also be purchased as loose items.

Once the Floristoon cable and fittings have been hung, electrical connection is made simply by inserting and twisting the unique 3 pin Flori-2X adaptor into a moulded-on Flori-2X outlet. As Floristoon-2X utilises 3C cable only, circuits with emergency fittings should be permanently energised to avoid damaging tubes and battery packs through repetitive discharging. Where there is a routine requirement to switch off emergency fittings, please refer to our new Flori-67/4P system, which incorporates 4 core cable with 4 pin connectors, enabling an unswitched supply to be provided for the emergency pack.

From May 2009, 5' fittings with HF controlgear are available. It is generally recommended that fittings with HF gear are not installed on the same circuit as fittings switch start.

Patent GB 2248148

Flori-2X Fitting plugged-in to a Flori-2X outlet

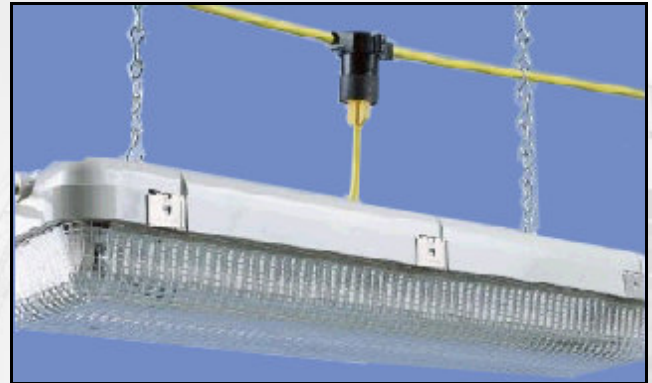

Item No.	Type	Description
S060502	Floristoon-2X/10/2.5/FE	100M 2.5mm ² 3C cable - a Flori outlet every 10M
S060503	Floristoon-2X/7/2.5/FE	100M 2.5mm ² 3C cable - a Flori outlet every 7M
S060504	Floristoon-2X/5/2.5/FE	100M 2.5mm ² 3C cable - a Flori outlet every 5M
S060505	Floristoon-2X/10/1.5	100M 1.5mm ² 3C cable - a Flori outlet every 10M
S060506	Floristoon-2X/7/1.5	100M 1.5mm ² 3C cable - a Flori outlet every 7M
S060507	Floristoon-2X/5/1.5	100M 1.5mm ² 3C cable - a Flori outlet every 5M
S060508	Flori-2X/W/2	Fluorescent Fitting, 5' single c/w Flori Adaptor
S060724	Flori-2X/W/2/HF	As S060508 but with HF controlgear
S060509	Flori-2X/W/2/218	Fluorescent Fitting, 2' twin c/w Flori Adaptor
S060510	Flori-2X/W/2/EMER	As 060508 plus 3 hour emergency battery pack
S060725	Flori-2X/W/2/EMER/HF	As S060510 but with HF controlgear
S060619	Flori-2X/W/2/218/EMER	As S060509 plus 3 hour emergency battery pack
S060511	Flori-2X Adaptor	2.5M 1.5mm ² 3C cable c/w moulded-on adaptor
S060155	Flori Chain	10 metre lengths of Jack Chain
S060273	Flori Cap	Push-on cap to blank-off unused outlets



Flori-2X Adaptor Outlets are finger proof but should be capped-off if not used.

For special applications, Floristoon can be made from LSOH or TQ cable.

THE POWER PROFESSIONALS

HIGHER POWER TRANS POWER SAFE POWER TEM POWER PRO POWER GREEN POWER

• **SOUTH** 1 Thomas Road, Optima Park, Crayford, Kent DA1 4GA Tel: 0845 074 0084 Fax: 0845 074 0085

• **NORTH** Unit 55, Monckton Road Ind Estate, Wakerley WF2 7AL Tel: 0845 074 0086 Fax: 0845 074 0087

www.blakley.co.uk • sales@blakley.co.uk

THE COMPANY RESERVES THE RIGHT TO CHANGE PRODUCTS WITHOUT PRIOR NOTICE.



Cert. No. 902091

HPDS10 - 04/09