

## Socket Outlet Assemblies with Loop-in / out Terminal Facility


A range of 110V and 230V surface mounting socket outlets designed for use on ring main circuits, with the facility to loop-in / out over sized conductors. Versions are available with Single or Twin 16A and 32A, 2P+E sockets. Enclosures are made from 1.6mm thickness mild steel: 110V versions are supplied with a durable yellow powder coated finish and 230V in blue.

Item Number	Type	Description
S200644	SMB/S1-16/110/6	1 x 16A 110V socket; 2 x 6mm <sup>2</sup> terminals
S200645	SMB/S1-32/110/6	1 x 32A 110V socket; 2 x 6mm <sup>2</sup> terminals
S200736	SMB/S2-16/110/6	2 x 16A 110V sockets; 2 x 6mm <sup>2</sup> terminals
S200738	SMB/S2-32/110/6	2 x 32A 110V sockets; 2 x 6mm <sup>2</sup> terminals
S200956	SMB/S1-16/110/16	1 x 16A 110V socket; 2 x 16mm <sup>2</sup> terminals
S200957	SMB/S1-32/110/16	1 x 32A 110V socket; 2 x 16mm <sup>2</sup> terminals
S200732	SMB/S2-16/110/16	2 x 16A 110V sockets; 2 x 16mm <sup>2</sup> terminals
S200734	SMB/S2-32/110/16	2 x 32A 110V sockets; 2 x 16mm <sup>2</sup> terminals
S200504	SWA/SMB/S1-16/110/16	1 x 16A 110V socket; 2 x 16mm <sup>2</sup> for SWA
S200309	SWA/SMB/S1-32/110/16	1 x 32A 110V socket; 2 x 16mm <sup>2</sup> for SWA
S200518	SWA/SMB/S1-32/110/35	1 x 32A 110V socket; 2 x 35mm <sup>2</sup> for SWA
S200737	SMB/S2-16/230/6	2 x 16A 230V sockets; 2 x 6mm <sup>2</sup> terminals
S200739	SMB/S2-32/230/6	2 x 32A 230V sockets; 2 x 6mm <sup>2</sup> terminals
S200484	SMB/S1-16/230/16	1 x 16A 230V socket; 2 x 16mm <sup>2</sup> terminals
S200733	SMB/S2-16/230/16	2 x 16A 230V sockets; 2 x 16mm <sup>2</sup> terminals
S200735	SMB/S2-32/230/16	2 x 32A 230V sockets; 2 x 16mm <sup>2</sup> terminals



Sockets are manufactured to BS EN 60309-2 and are supplied as splashproof to IP44. Versions fitted with IP67 rated sockets can be supplied, as can moulded enclosures.

Please note: plugs to BS EN 60309-2 are unfused, therefore the overcurrent protection feeding the ring should not exceed the current rating of the socket. If it is required to feed the ring from an MCB or fuse with a current rating in excess of the socket, we can produce special versions of these assemblies with integral MCB or fuse protection incorporated within the socket enclosure.

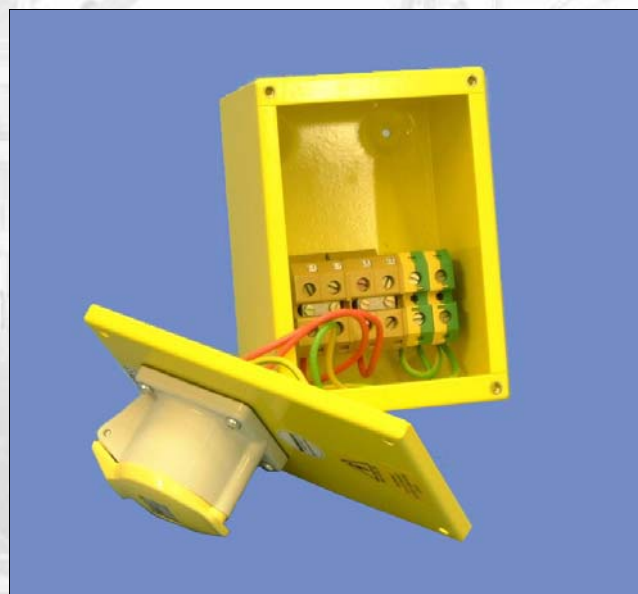

S200518 - 1 x 32A 110V Socket; 2 x 35mm<sup>2</sup> terminals per phase

**THE POWER PROFESSIONALS**

**HIGHER POWER TRANS POWER SAFE POWER TEM POWER PRO POWER GREEN POWER**

- **SOUTH** 1 Thomas Road, Optima Park, Crayford, Kent DA1 4GA Tel: 0845 074 0084 Fax: 0845 074 0085
- **NORTH** Unit 55, Monckton Road Ind Estate, Wakefield WF2 7AL Tel: 0845 074 0086 Fax: 0845 074 0087