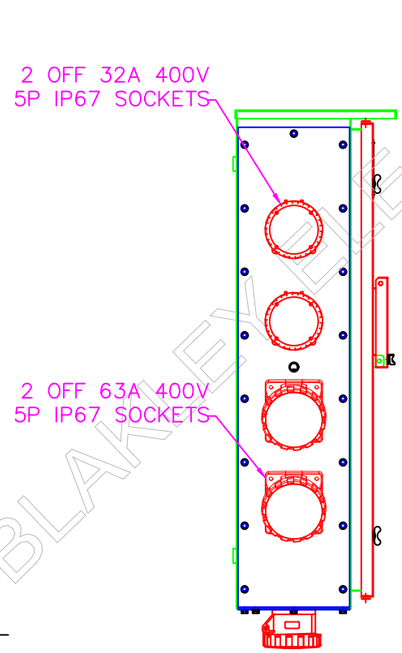

VIEW ON L.H.S

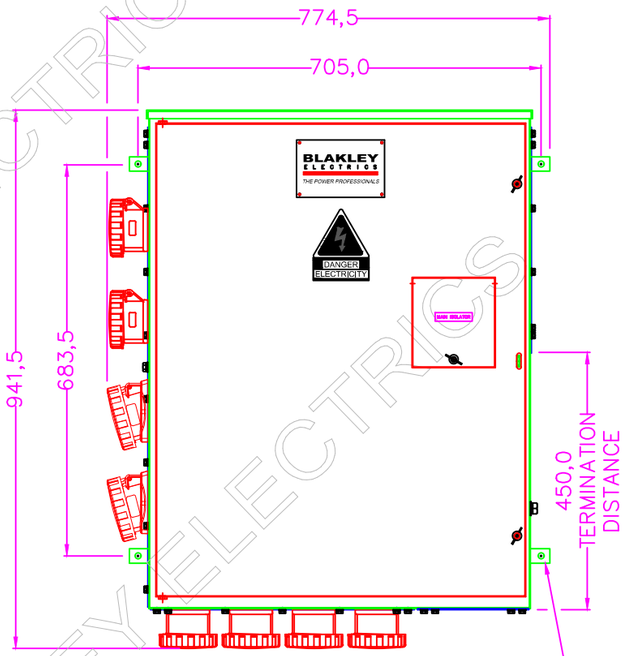

VIEW ON FRONT

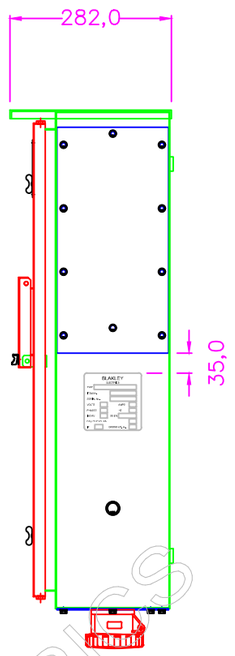

VIEW ON R.H.S

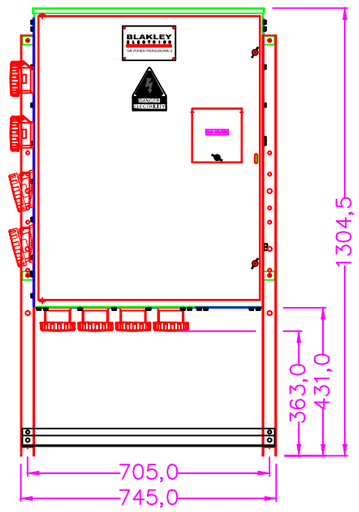

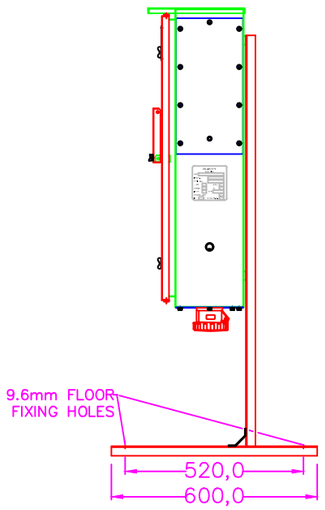

VIEW SHOWING OPTIONAL STAND KIT N.T.S

EXTERNAL M10 HOLES
CAN BE USED FOR MOUNTING
THE ASSEMBLY TO A WALL,
A STAND OR A CRASH FRAME.

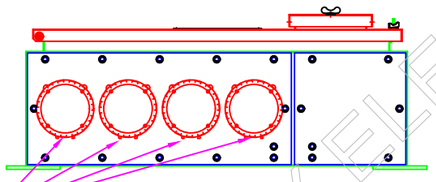

VIEW ON BOTTOM

CUSTOMER INFORMATION COPY

NOTES:

1) DRAWING SHOWS B3 MDA TYPICAL ENCLOSURE WITH DOLLY COVER DESIGNED TO IP55.
2) FITTED WITH REMOVABLE GLAND PLATES AND SOCKET PLATES.
3) FIT LABELS IN POSITIONS AS DETAILED
4) AS THE 63A SOCKETS ARE NOT SWITCHED AND INTERLOCKED THE ASSEMBLY DOES NOT COMPLY WITH THE REQUIREMENTS OF BS7375: DISTRIBUTION OF ELECTRICITY ON CONSTRUCTION AND DEMOLITION SITES.
5) MAXIMUM RECOMMENDED CABLE SIZE: 150mm 4C SWA USING NARROW PALM CABLE LUGS.

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.

REV:	–
EDR:	–

UNLESS OTHERWISE STATED:–
ALL DIMENSIONS IN MM.
TOLERANCES TO H30052
FIXING STANDARD TO H30051
WIRING STANDARD TO H20051
WELDING STANDARD TO QAI 061.

DO NOT SCALE THIS DRAWING.
IF IN DOUBT, ASK

TITLE
GENERAL ASSEMBLY
B3/1250–4P
C8–RCD/S8/IP55

MATERIAL	MILD STEEL
SIZE	A3
REF.	S140617
COPY ISSUED	19 Nov 2019
ORIGINAL SCALE	1:10
DATE.	07/11/19
DRN.	P.R
CHKD.	
APPD.	
DRAWING No.	C31639
REVISION	

BLAKLEY ELECTRICS LIMITED