


SINGLE PHASE DISTRIBUTION BOARD
10 WAY SP PAN ASSEMBLY

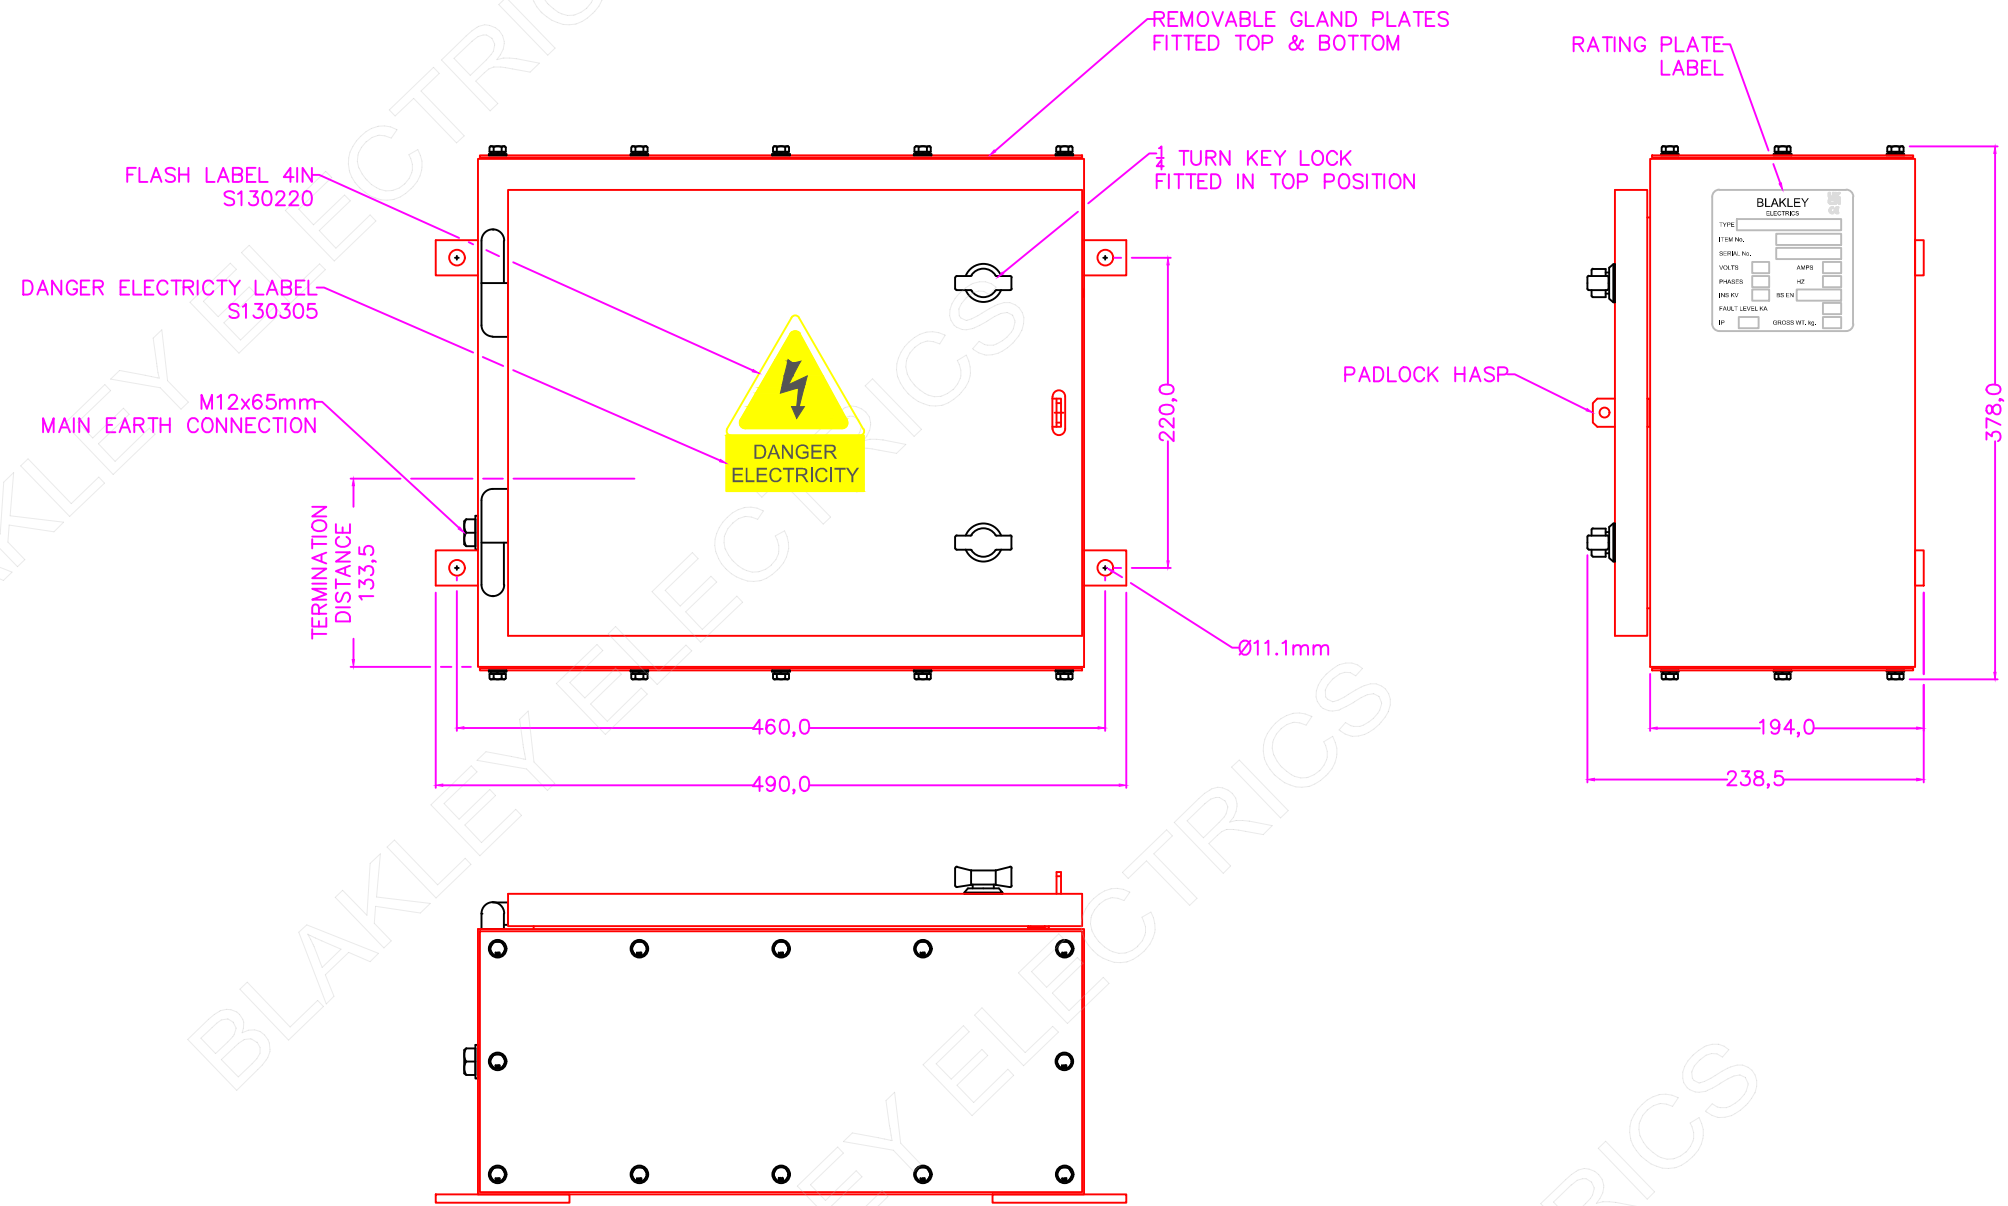

CUSTOMER
INFORMATION
COPY

NOTES:

1. INGRESS PROTECTION: IP66.
2. PAINT FINISH: DARK ADMIRALTY GREY BS4800 18B25.
3. CABLE ENTRY: TOP & BOTTOM REMOVABLE GLAND PLATES.
4. MAXIMUM CABLE ACCEPTANCE: 50mm RIGID, 35mm FLEXIBLE.
5. INSET PLATE PROVIDES IP2X PROTECTION WHEN DOOR OPEN.

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.

REV:	-										
EDR:	-										
UNLESS OTHERWISE STATED:- ALL DIMENSIONS IN MM. EWM REFERS TO ENGINEERING & WORKSHOP MANUAL TOLERANCES TO EWM SECTION 3.1.3 FIXING STD TO EWM APPENDIX D. WIRING STD EWM SECTION 4. WELDING STANDARD TO QAI 061.						MATERIAL		MILD STEEL			BASED ON
DO NOT SCALE THIS DRAWING. IF IN DOUBT, ASK						REF.	S040322P	COPY ISSUED		24 May 2023	
TITLE						ORIGINAL SCALE	1:5				
DISTRIBUTION BOARD						DATE.	18/01/23				
DB166/I125-2P/ MGPA10/P						DRN.	P.R	DRAWING No.		C37475	
						CHKD.		REVISION			
						APPD.					