


ENCLOSURE DETAILS

FOR 18 WAY PAN ASSEMBLY/EXTENSION BOX/SPREADER BOX AND METER CHAMBER

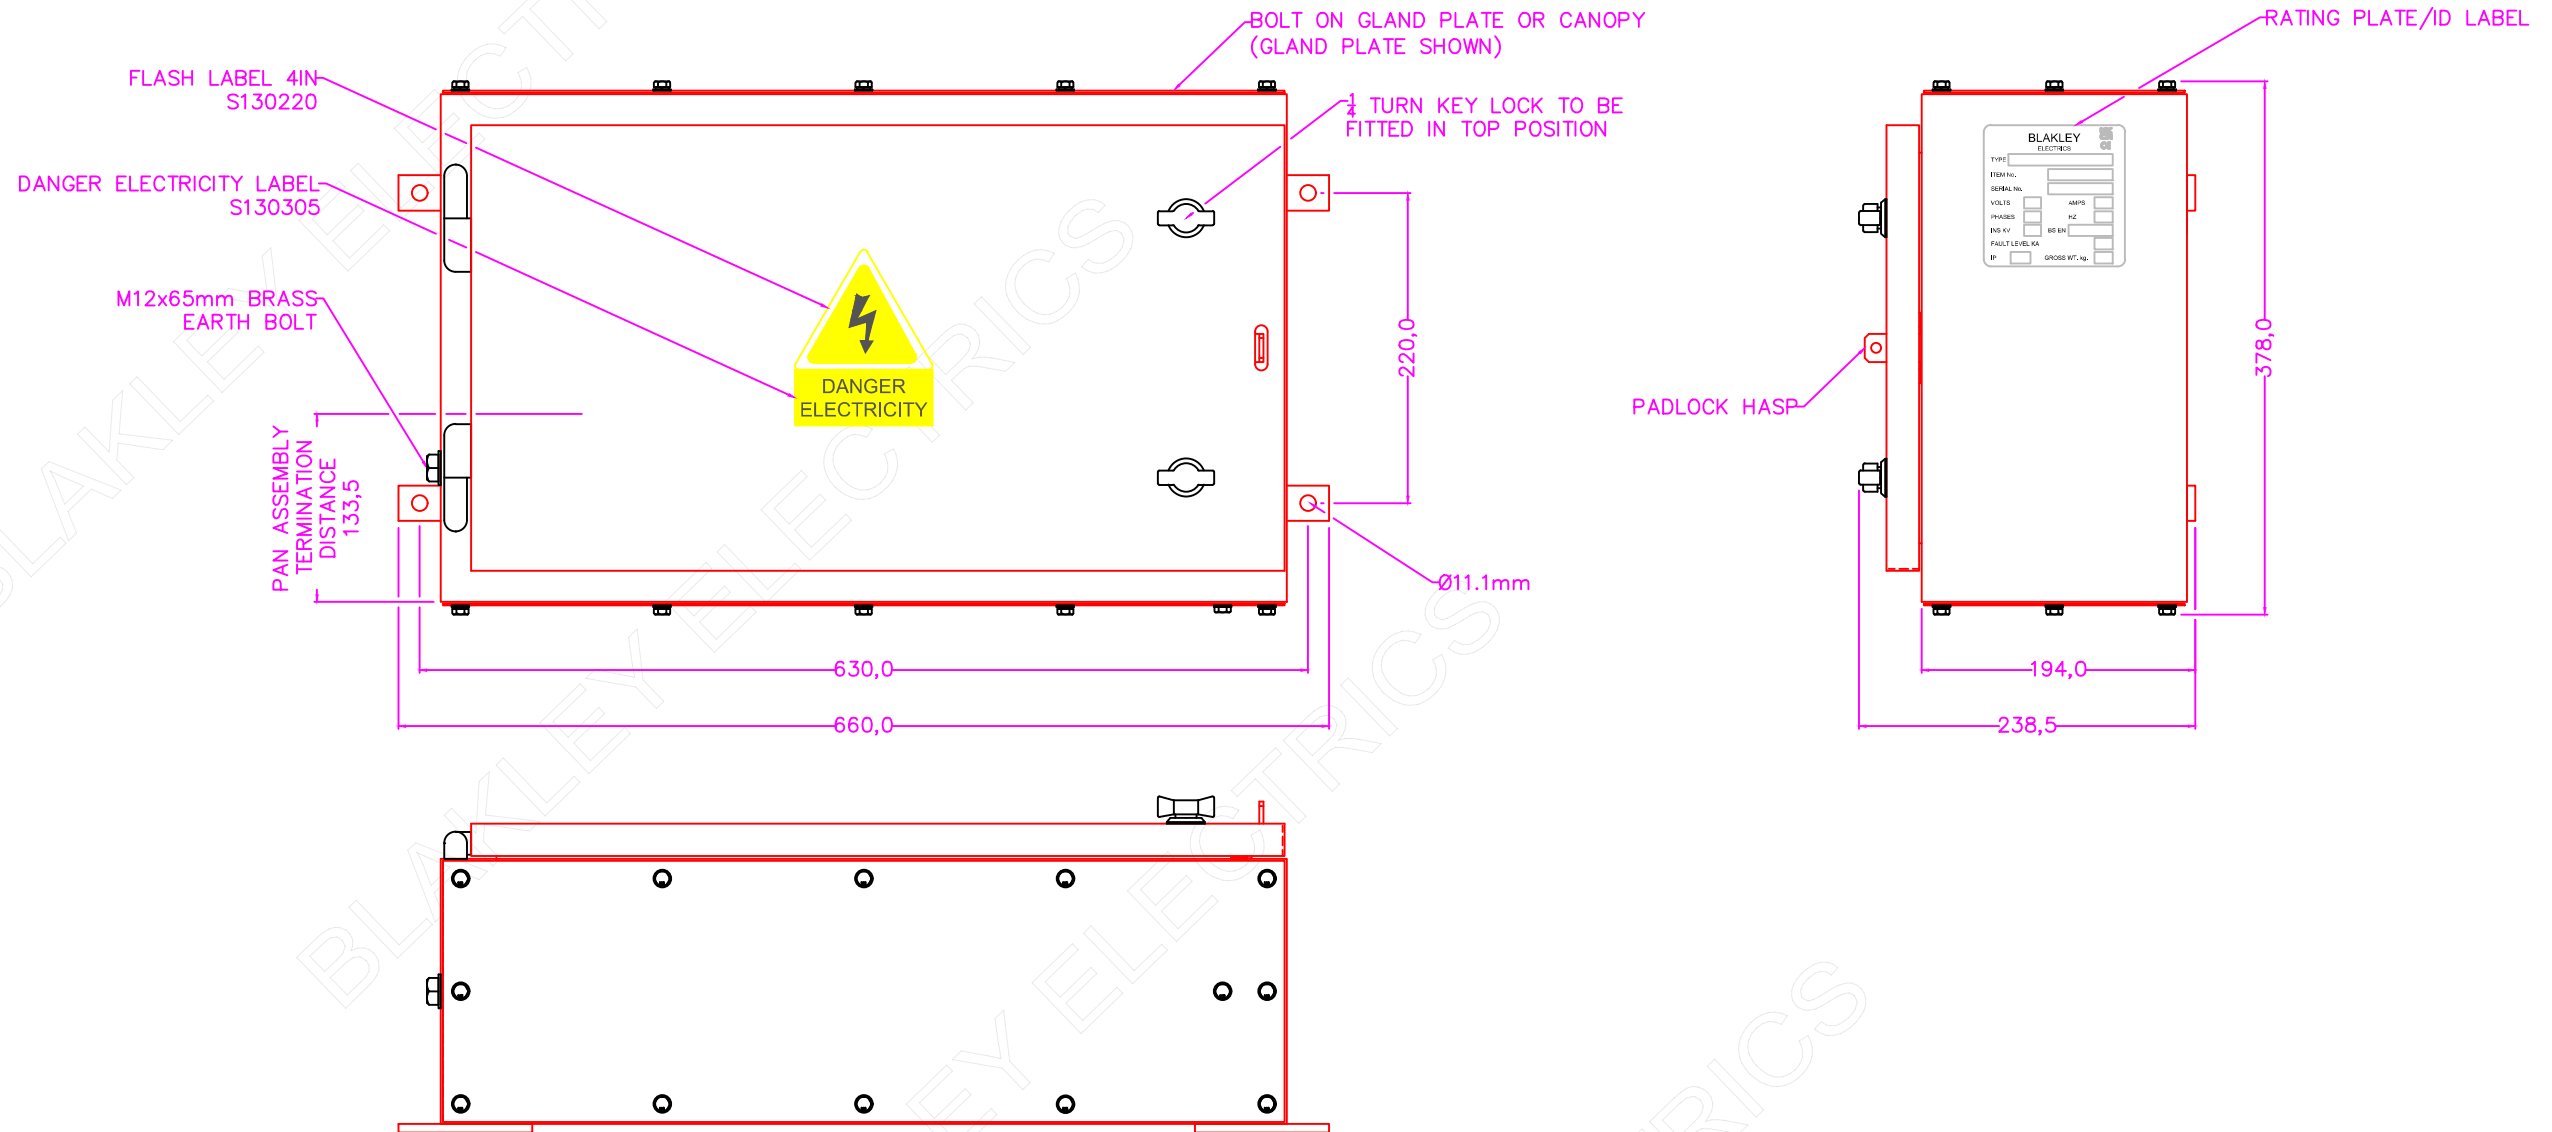

NOTES:

1. ALL ENCLOSURES ARE IDENTICAL, ALL USE WALL MOUNTING LUGS WITH Ø11.1mm FIXING HOLES.
2. ALL ENCLOSURES HAVE A HINGED COVER FITTED WITH 1/4 TURN KEY LOCK, 1/4 TURN LOCK & PADLOCK HASP.
3. EACH ENCLOSURE CAN BE PLACED ON THE TOP OR THE BOTTOM OF A DISTRIBUTION BOARD, THE ENCLOSURES CAN BE DOUBLE STACKED OR USED AS A STAND ALONE ITEM.
4. ENCLOSURES CAN BE EQUIPPED WITH TOP & BOTTOM GLAND PLATES OR A TOP CANOPY.
5. ALL OPTIONS COME WITH A INSET PLATE PROVIDING PROTECTION TO IP2X WHEN DOOR HAS BEEN OPENED.
6. PAINT FINISH: DARK ADMIRALTY GREY BS4800 18B25
7. MAXIMUM CABLE ACCEPTANCE: 50mm RIGID, 35mm FLEXIBLE (FOR INCOMER ON DISTRIBUTION ASSEMBLY)

REV: -										
EDR: -										
UNLESS OTHERWISE STATED:- ALL DIMENSIONS IN MM. EWM REFERS TO ENGINEERING & WORKSHOP MANUAL TOLERANCES TO EWM SECTION 3.1.3 FIXING STD TO EWM APPENDIX D. WIRING STD EWM SECTION 4. WELDING STANDARD TO QAI 061.						MATERIAL MILD STEEL		BASED ON		
DO NOT SCALE THIS DRAWING. IF IN DOUBT, ASK						REF. DB366-*	COPY ISSUED			
TITLE GENERAL ASSEMBLY FOR DB366-* SPREADER/EXTENSION						ORIGINAL SCALE 1:5				
						DATE. 13/02/23			DRAWING No. C37477	
						DRN. P.R.				
						CHKD.				
						APPD.				

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.