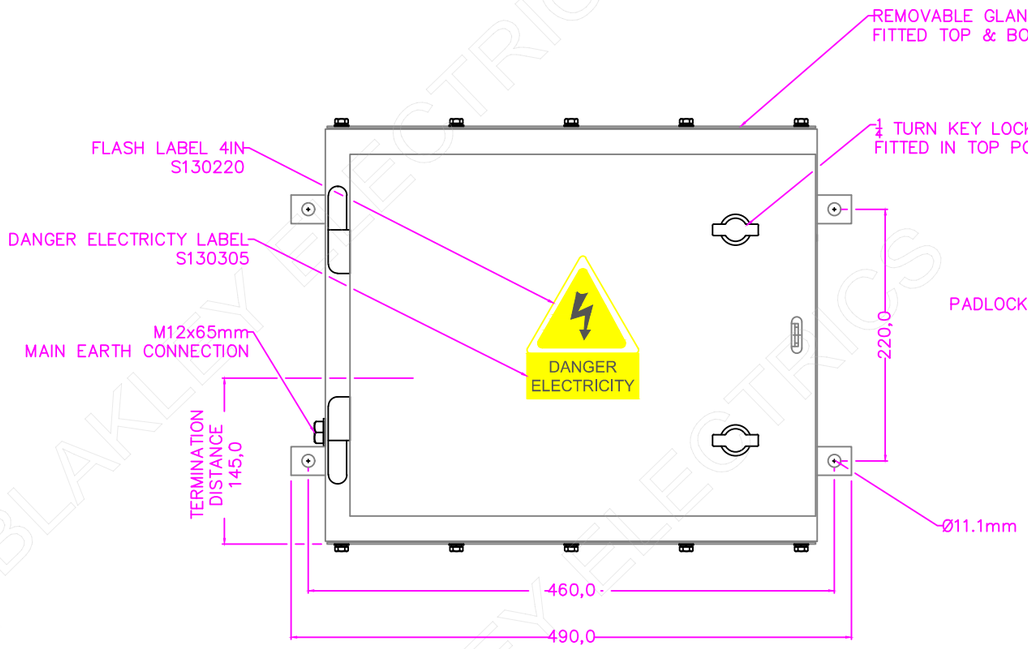

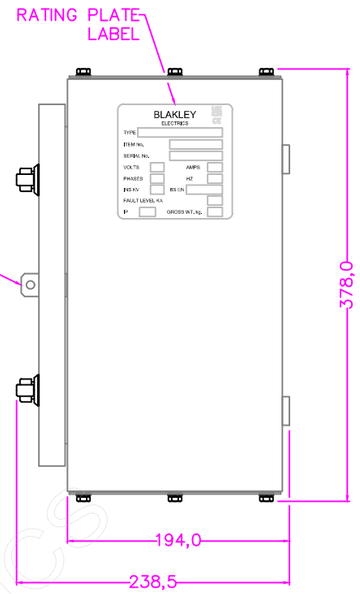

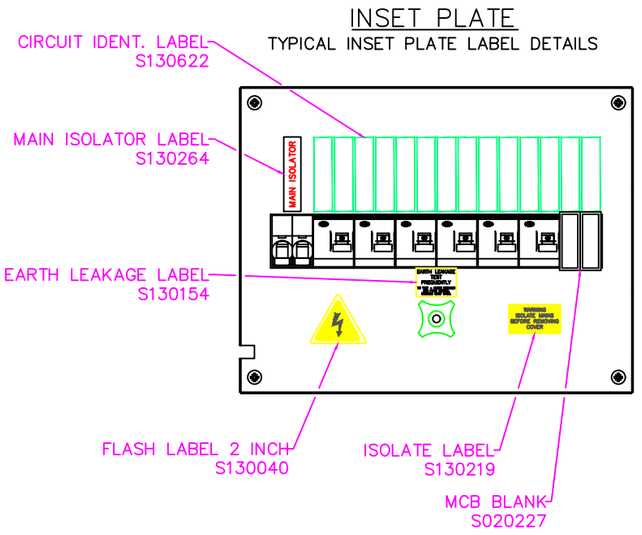

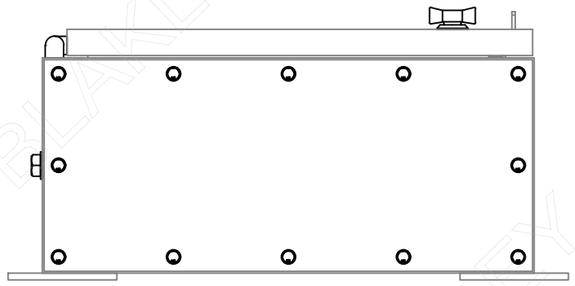

CUSTOMER INFORMATION COPY

NOTES:
1. INGRESS PROTECTION: IP66.
2. PAINT FINISH: DARK ADMIRALTY GREY BS4800 18B25.
3. CABLE ENTRY: TOP & BOTTOM REMOVABLE GLAND PLATES.
4. MAXIMUM CABLE ACCEPTANCE: 50mm RIGID, 35mm FLEXIBLE.
5. INSET PLATE PROVIDES IP2X PROTECTION WHEN DOOR OPEN.

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.

REV:	–
EDR:	–

UNLESS OTHERWISE STATED:–
ALL DIMENSIONS IN MM.
EWM REFERS TO ENGINEERING & WORKSHOP MANUAL
TOLERANCES TO EWM SECTION 3.1.3
FIXING STD TO EWM APPENDIX D.
WIRING STD EWM SECTION 4.
WELDING STANDARD TO QAI 061.

DO NOT SCALE THIS DRAWING. IF IN DOUBT, ASK

TITLE
GENERAL ASSEMBLY
DB166/I100–2P/7W/ RCBO6–16/110V

MATERIAL	MILD STEEL
BASED ON	C31343
REF.	S040395A
COPY ISSUED	27 Nov 2023
ORIGINAL SCALE	1:5
DATE.	21/11/23
DRN.	P.R
CHKD.	
APPD.	
DRAWING No.	C38254
REVISION	

BLAKLEY ELECTRICS

A3