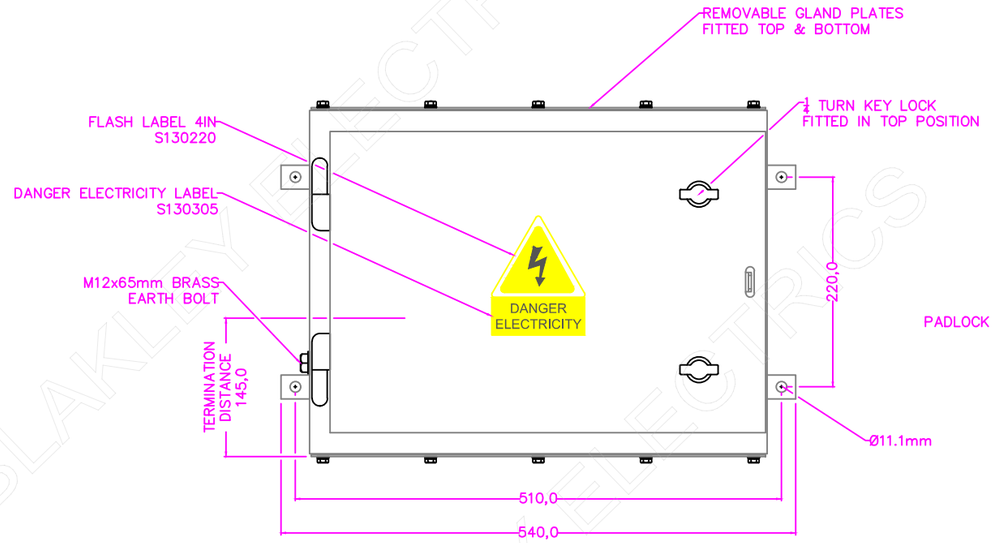

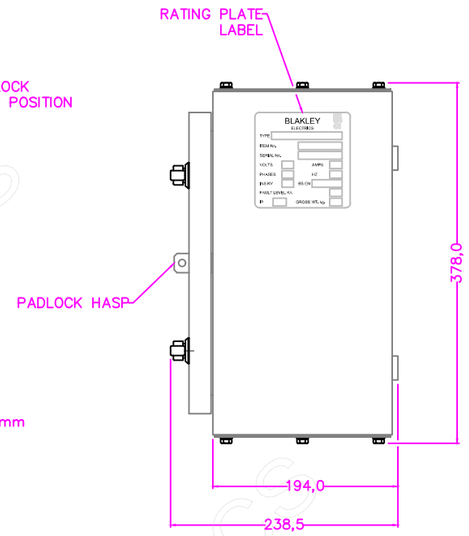

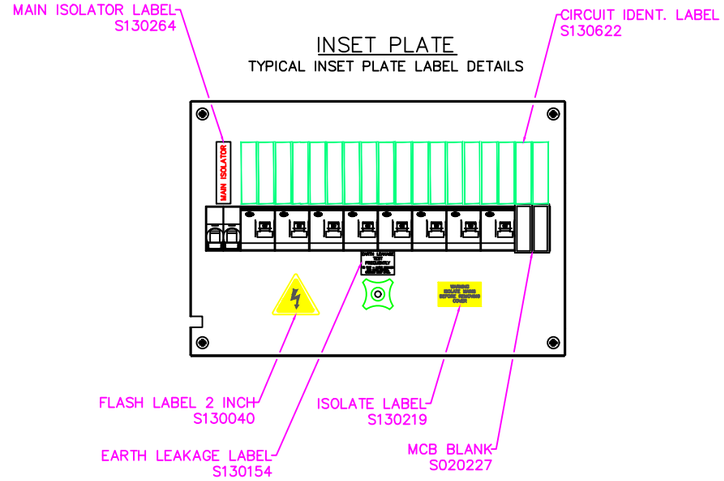

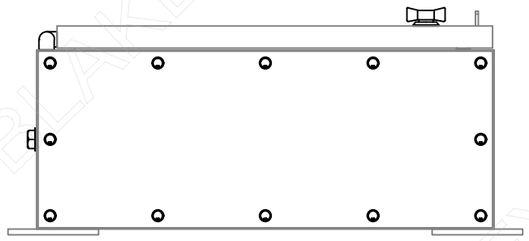

CUSTOMER INFORMATION COPY

NOTES:
1. INGRESS PROTECTION: IP66.
2. PAINT FINISH: DARK ADMIRALTY GREY BS4800 18B25.
3. CABLE ENTRY: TOP & BOTTOM REMOVABLE GLAND PLATES.
4. MAXIMUM CABLE ACCEPTANCE: 50mm RIGID, 35mm FLEXIBLE.
5. INSET PLATE PROVIDES IP2X PROTECTION WHEN DOOR OPEN.

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.

REV:	–
EDR:	–

UNLESS OTHERWISE STATED:–
ALL DIMENSIONS IN MM.
EWM REFERS TO ENGINEERING & WORKSHOP MANUAL
TOLERANCES TO EWM SECTION 3.1.3
FIXING STD TO EWM APPENDIX D.
WIRING STD EWM SECTION 4.
WELDING STANDARD TO QAI 061.

DO NOT SCALE THIS DRAWING. IF IN DOUBT, ASK

TITLE
GENERAL ASSEMBLY
DB266/1100–2P/9W/ RCBO8–16/110V

MATERIAL: MILD STEEL | BASED ON: C31344
REF.: S040396A | COPY ISSUED: 27 Nov 2023
ORIGINAL SCALE: 1:6
DATE.: 23/11/23
DRN.: P.R.
CHKD.:
APPD.:

BLAKLEY ELECTRICS

DRAWING No.: C38257
REVISION:

A3