

## Introducing the SlimLight

The SlimLight is a new, 110V, LED luminaire, which is housed within a compact, robust but lightweight extruded aluminium body. The luminaire has a 3000 lumens light output and is rated to IP65. The SlimLight incorporates a 30W LED array, which is located behind an opaque, polycarbonate diffuser. The diffuser eliminates the glare often associated with LED floodlights, making the SlimLight particularly suitable for low level installations, such as walkway lighting. It is designed for both indoor and outdoor applications.

SlimLights are available as unwired luminaires and also pre-wired with a variety of input leads including:

- a Flori-67/3P adaptor lead, enabling SlimLights to be fed from our Flori-67/3P plug and play site lighting system
- a 5m input lead fitted with a 16A, 2P+E 110V IP44 plug
- a 7m input lead fitted with a 16A, 2P+E, 110V IP44 plug and a 7m output lead fitted with a 16A, 2P+E, 110V IP44 coupler socket, which enables multiple SlimLights to be connected in series

The overall IP rating of the pre-wired assembly will be dictated by the IP rating of the connectors. Standard 16A connectors are rated to IP44 but IP67 versions are available. Flori-67 adaptors are rated at IP67. When fitted with IP67 connectors, the rating of the overall assembly is IP65.


The SlimLight incorporates channels in the rear of the body, which allow a range of mounting brackets to be fitted. As standard, two suspension eyes are supplied but we are also able to offer magnet brackets, wall mounting brackets, scaffold brackets or a bracket to mount the SlimLight on to the SpikeLight stand. Please contact us when special bracketry is required.

### SlimLight Part Numbers

Part No.	Type	Description
S061069	AACL/110/300	SlimLight, 30W, 110V, unwired
S061097	FLORI-67/3P/AACL/110/300	SlimLight, 30W, 110V fitted with a 2m Flori-67/3P adaptor
S061098	AACL/110/300/1.5/5/16	SlimLight, 30W, 110V fitted with a 5m input lead c/w 16A 110V IP44 plug
S061099	AACL/110/300/1.5/7/16-16	SlimLight, 30W, 110V fitted with a 7m input and output lead c/w 16A 110V IP44 plug and coupler



Part No. S061069 SlimLight (unwired), showing front, side and rear views.

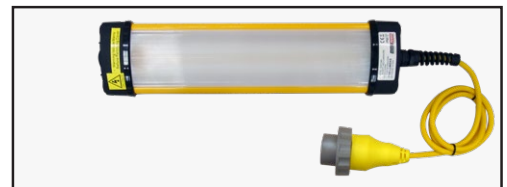

Part No. S061097: SlimLight complete with Flori-67/3P Adaptor



Part No. S061098: SlimLight complete with 5m cable complete with 16A plug



Part No. S061099: SlimLight fitted with 7m input and output leads, complete with 16A 2P+E 110V plug and coupler